

# PRODUCT DATA SHEET

## Membrane Bioreactor (MBR)

water | wastewater | sewage




### OVERVIEW

MAK Water's Membrane Bioreactor (MBR) type packaged sewage treatment plants are designed to treat domestic strength sewage, to achieve "Class A+" treated effluent, suitable for reuse in "risk category high" applications or for discharge to sensitive environments.

The standard treatment process includes influent screening, balance tank mixing, anoxic & aerobic treatment, flat sheet membrane filtration with air scouring and CIP system, and effluent disinfection (hypochlorite dosing). MAK Water's bioreactors are constructed of corrosion resistant FRP, and are self-contained, modular systems for easy deployment to remote locations.

### STANDARD (PRODUCT / SYSTEM TYPE) PROCESS

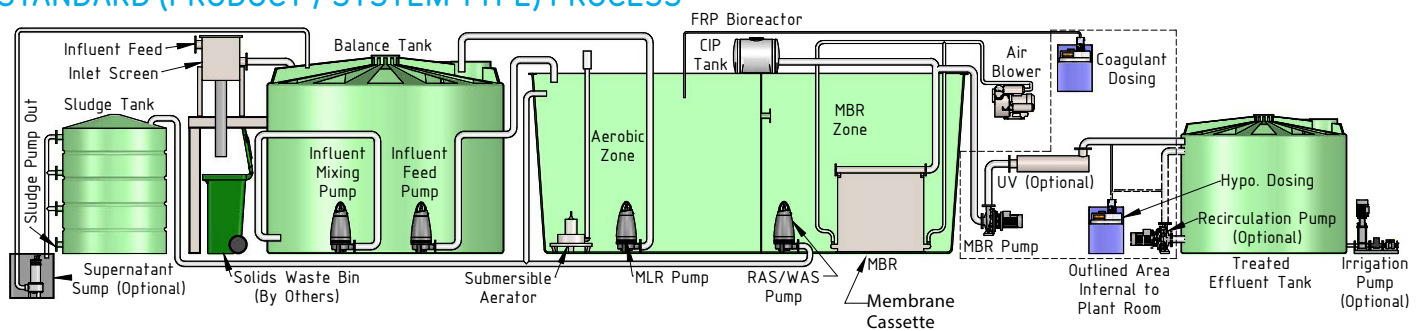

### STANDARD SPECIFICATIONS

Parameter		Units	MBR-020	MBR-045	MBR-060	MBR-075	MBR-155	MBR-225	MBR-315
Treatment capacity (min/max)		m <sup>3</sup> /day	10 / 20	22.5 / 45	30 / 60	37.5 / 75	77.5 / 155	112.5 / 225	157.5 / 315
*1Balance tank volume (recommended)		m <sup>3</sup>	21	47.1	62.9	78.6	162.4	235.7	330
*1Treated effluent tank volume (recommended)		m <sup>3</sup>	20	45	60	75	155	225	315
Sludge tank volume		m <sup>3</sup>	3.5	9.5	13.5	22.5	32	46	64
Sludge waste volume (max)		m <sup>3</sup> /month	5.3	13.2	17.5	21.9	45.3	65.8	92.1
*2Irrigation pump duty		m <sup>3</sup> /hr @ 350 kPa	2.5	5.6	7.5	9.4	19.4	28.1	39.4
Screen wash water supply		m <sup>3</sup> /hr @ 500 kPa	1.1	2.2	2.2	2.2	5.5	7.5	11
Ambient temperature (min/max)		°C	1 / 43						
Power supply		-	AC 415V, 3 Phase, 50 Hz (other voltages and frequencies available on request)						
Power consumption	MBR plant	kW	9	19	26	36	42	65	83
	*2, *3Recirculation pump		0.75	1.1	1.1	1.5	2.2	3	4
	*2Irrigation pump		0.75	1.5	2.2	2.2	7.5	7.5	11
Footprint	FRP bioreactor(s) & access platform(s)	m	6 x 3.2	9 x 3.2	12 x 3.2	12 x 3.2	12 x 5.6	12 x 8.8	12 x 12
	Containerised plant room	m	N/A*4						
	Sludge tank(s)	m	Ø1.6	Ø2.6	Ø2.97	Ø3.57	Ø3.95	7.7 x 3.55	8.5 x 3.95

Characteristics	Units	Influent	Effluent
Temperature	°C	15~35	-
*5pH	pH units	6.5~8.5	6.5~8.5
*6Biological oxygen demand (BOD)	mg/L	*7≤350	<10
Suspended solids (TSS)	mg/L	*7≤350	<10
Emulsified oil and grease	mg/L	<2.0	-
Free oil & grease	mg/L	<0.1	-
Total nitrogen (T-N)	mg/L	<50	<40 (or <10 mg/L reduction from influent value)
Total phosphorus (T-P)	mg/L	<16	4~12 (variable according to coagulant dose rate)
Total dissolved solids (TDS)	mg/L	<2,000	-
Turbidity	NTU	-	<2 (95%ile)
E.Coli	cfu/100 mL	-	<1
Coliphages	pfu/100 mL	-	<1
Clostridia	cfu/100 mL	-	<1
Free chlorine	mg/L	-	0.2~2
*2UV dose	mJ/cm <sup>2</sup> @ 70% UVT	-	40
Bacteria removal (membrane only)	Log	-	*8≥4
Virus removal (membrane only)	Log	-	*8≥1

\*1 Sold separately, \*2 Optional equipment, \*3 Sizing based on recommend treated effluent tank volume, \*4 Plant room integral to FRP bioreactor, \*5 Caustic dosing may be required where influent alkalinity is inadequate, \*6 Sucrose dosing may be required where ratio of BOD to TKN is ≤5, \*7 Referenced from Metcalf & Eddy (5th edition, 2014), Typical composition of untreated domestic wastewater; higher/lower design values available on request, \*8 Additional log credits are available with UV and chlorination; consult MAK Water.

## STANDARD SPECIFICATIONS

✓ = Standard Supply, o = Optional Supply, - = Not Available

Equipment		MBR-020	MBR-045	MBR-060	MBR-075	MBR-155	MBR-225	MBR-315
Automatic inlet screen (2 mm in two dimensions)		✓	✓	✓	✓	✓	✓	✓
Influent mixing pump		✓	✓	✓	✓	✓	✓	✓
Influent feed pump		✓	✓	✓	✓	✓	✓	✓
FRP bioreactor(s) with aluminium access platform(s) & ladder(s)	Aerobic zone with submersible aerator & MLR pump	✓	✓	✓	✓	✓	✓	✓
	MBR zone with flat sheet membranes and submersible RAS/WAS pump	✓	✓	✓	✓	✓	✓	✓
	CIP/membrane flush tank	✓	✓	✓	✓	✓	✓	✓
	Bioreactor roofing (COLORBOND® steel sheeting)	o	o	o	o	o	o	o
Plant room with air conditioning, overhead lighting & GPOs for maintenance	Chemical dosing	Coagulant	✓	✓	✓	✓	✓	✓
		Hypochlorite	✓	✓	✓	✓	✓	✓
		Sucrose	o	o	o	o	o	o
		Caustic	o	o	o	o	o	o
	MBR permeate pump		✓	✓	✓	✓	✓	✓
	Treated effluent tank recirculation pump		o	o	o	o	o	o
	Pressurised UV reactor (non-validated*)		o	o	o	o	o	o
	PLC control system with touch screen HMI		✓	✓	✓	✓	✓	✓
Externally mounted MBR air scour blower		✓	✓	✓	✓	✓	✓	✓
Sludge tank with supernatant sampling points & discharge valves		✓	✓	✓	✓	✓	✓	✓
Supernatant sump with submersible pump & level control		o	o	o	o	o	o	o
Irrigation pump with level control & mechanical flow totaliser / flow transmitter		o	o	o	o	o	o	o
Instrumentation	Standard package		✓	✓	✓	✓	✓	✓
	Premium package with ClearAccess™ remote monitoring		o	o	o	o	o	o

Instrumentation & Controls		Standard package	Premium package
Level switches	Balance, bioreactor and treated effluent tank	✓	-
	Chemical dosing & sludge tank float level switches	✓	✓
Level transmitters	Balance, bioreactor and treated effluent tank	-	✓
Pressure transmitters	Membrane differential pressure	✓	✓
Pressure switches and gauges		✓	✓
Flow transmitters	Influent feed, MLR and RAS/WAS	✓	✓
	Permeate and irrigation pump (with optional irrigation pump)	-	✓
Flow indicator	Permeate flow	✓	-
Mechanical flow totaliser	Irrigation pump (with optional irrigation pump)	✓	-
Analysers	Aerobic zone dissolved oxygen	✓	✓
	Aerobic zone pH analyser	-	✓
	MBR zone mixed liquor suspended solids	-	✓
	Permeate turbidity	-	✓
	Permeate pH and free chlorine	-	✓
UV intensity sensor (with optional UV steriliser)		-	✓
Variable speed drives	Influent feed pump	-	✓
	Submersible aerator	✓	✓
	MLR pump	-	✓
	RAS/WAS pump	-	✓
	MBR permeate pump	-	✓
ClearAccess™ remote monitoring & control capabilities		-	✓

\*1 Validated systems available on request

## MODEL SELECTION

<b>20</b>	Capacity – 20 m³/day
<b>45</b>	Capacity – 45 m³/day
<b>60</b>	Capacity – 60 m³/day
<b>75</b>	Capacity – 75 m³/day
<b>155</b>	Capacity – 155 m³/day
<b>225</b>	Capacity – 225 m³/day
<b>315</b>	Capacity – 315 m³/day
<b>XXX</b>	Capacity – specify m³/day (max)
<b>X</b>	Roofed bioreactor – without
<b>R</b>	Roofed bioreactor – included
<b>X</b>	Dosing systems – standard
<b>C</b>	Dosing systems – custom (specify)
<b>X</b>	Treated effluent tank recirculation pump - without
<b>E</b>	Treated effluent tank recirculation pump - included
<b>X</b>	Pressurised UV reactor – without
<b>U</b>	Pressurised UV reactor – included
<b>X</b>	Supernatant sump – without
<b>S</b>	Supernatant sump – included
<b>X</b>	Irrigation pump – without
<b>I</b>	Irrigation pump – included
<b>X</b>	Standard instrument package
<b>P</b>	Premium instrumentation package
<b>C</b>	Custom instrumentation (specify)
<b>X</b>	Specifications – standard
<b>C</b>	Specification – custom

### NEED A QUOTE?

COMPLETE THIS TABLE  
AND EMAIL TO...

[sales@makwater.com.au](mailto:sales@makwater.com.au)



**Disclaimer:** This document has been created with the greatest care and attention, however it is possible that information is either incomplete or out of date. MAK Water is continuously updating and improving its products and services, so please contact us for more detailed or updated specifications. MAK Water will not be held responsible for any errors resulting from the use of the information supplied herein.

MBR - - - - -